



MK6-2-B2_(24VDC)

SHOWN WITH OPTIONAL TOGGLE SWITCH

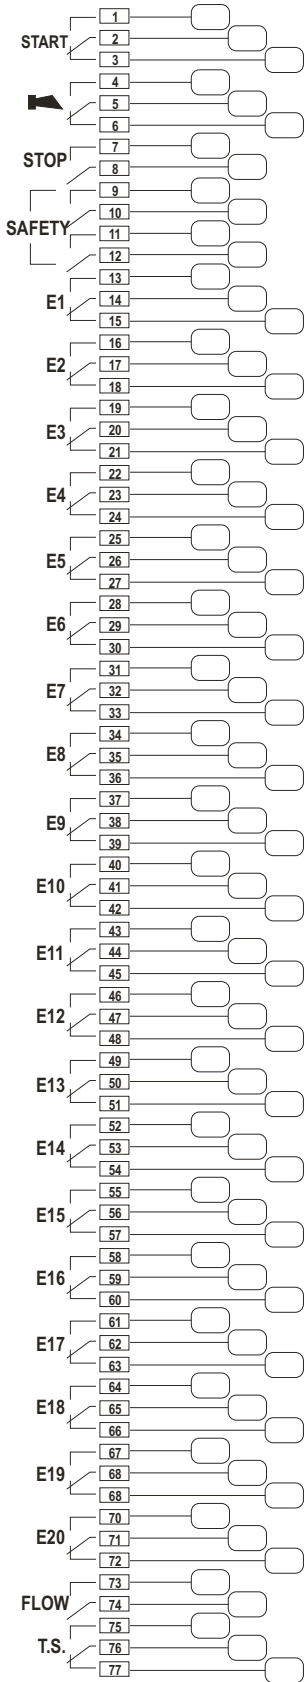


THE STOP RELAY IS THE PRIMARY SAFETY ELEMENT, AND MUST BE CONNECTED TO THE MAIN CONTACTOR OR SIMILAR.

THE SAFETY RELAY MUST BE CONNECTED IN SERIES WITH THE SUPPLY TO ALL MOTION OUTPUTS

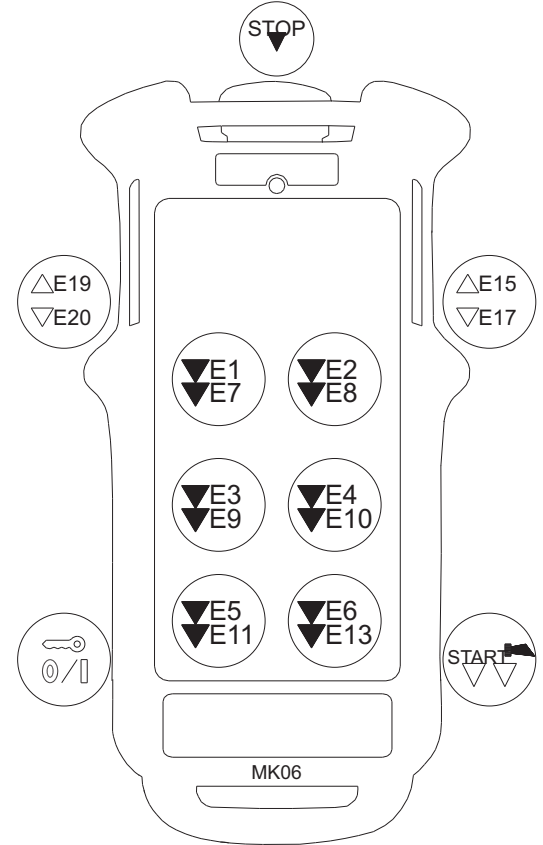

PO Box 5738
 Brendale DC QLD 4500
 Tel: 07 3889 9329
 Fax: 07 3889 9330
 support@industryiq.com.au



SERIAL NUMBER	REV	DRAWN
		A MDC 06.07.09
TRANSMITTER ENCODER 1 2 3 4 1 2 3 4 5 6 7 8 		RECEIVER DECODER 1 2 3 4 1 2 3 4 5 6 7 8
FREQUENCY:		MHz (FACTORY SET IN AUTO MODE)
MOTHERBOARD DIP SWITCHES		